


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 35 TOWNSHIP 17 RANGE 3  
DATE: 4-24-99 -- 2-28-04  
PARTY CHIEF: Wilcoxon - Kiste  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison See Note:  
METHOD OF ESTABLISHMENT: County

IN. S.P.C. E ZONE, NAD 83  
NAME: 17033507  
N: 513021.2951(m)  
E: 57364.0813(m)

NOTE: No lead plate fd.  
& no stone fd set as  
per ties, as per new  
construction 1998

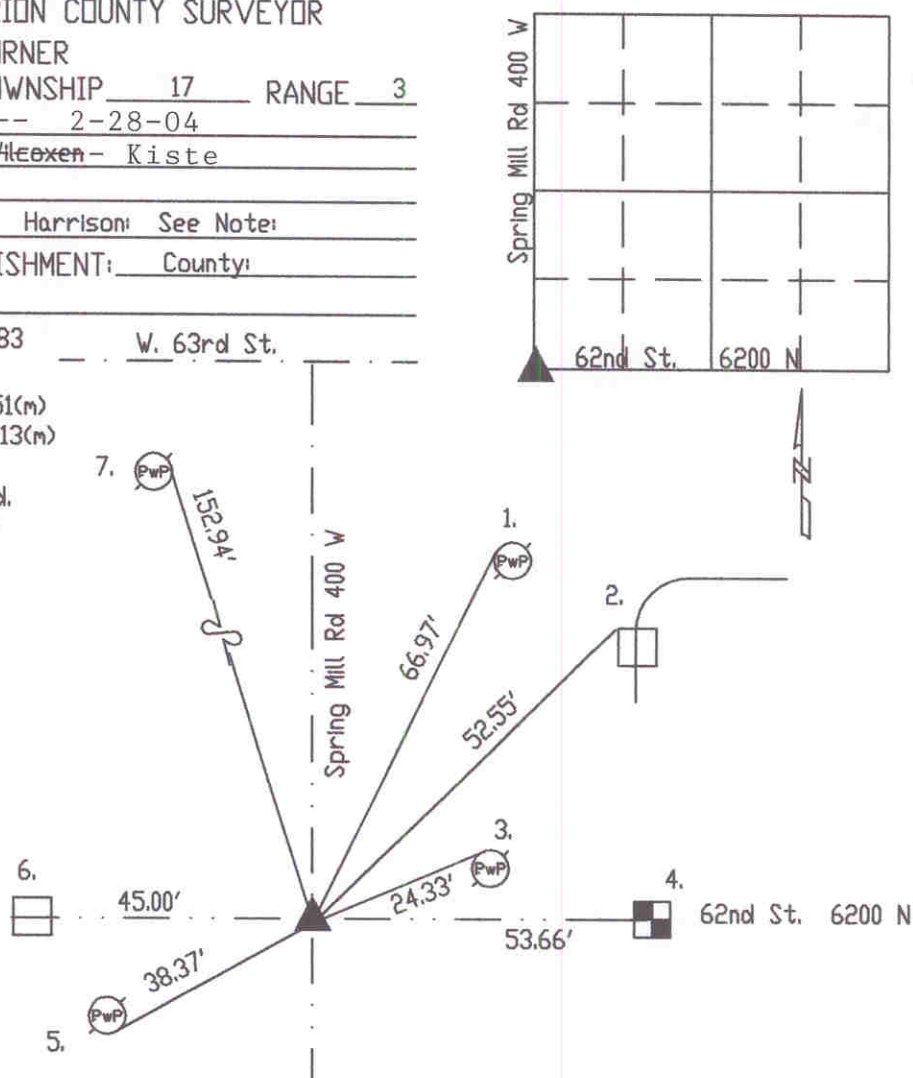

Original post set 1820 by Wm. B. Laughlin with witnesses: 8" beech S 6 W 36 links, 7" dogwood S 85 E 20 links per Marion County Atlas pg. 8. Survey by D.B. Hosbrook 5-10-1850 indicates no stone or witnesses per Washington Township Legal Survey Book pg. 8. Woerner 9-13-48 called a cross in concrete pavement. Monroe 4-21-58 called a road nail with brass washer. McLand 9-1-71 called road nail. Hiselman 4-6-76 called PK nail. Jacobs 11-18-87 called PK nail. Kiste 2-25-95 called PK nail. Excavated by Wilcoxon 10-19-98 and found PK nail 5" down as per ties. No stone was found during excavation. Harrison set.

HC733507

REF.	DISTANCE	DESCRIPTION
1.	66.97'	PK nail SW lamp pole #152-305A 15'up
2.	52.55'	Top NW corner concrete slab on stone wall
3.	24.33'	Road nail N PwP#392-IBT-305B 8'up
4.	53.66'	Due E to 'center' old county benchmark:
5.	38.37'	Road nail S PwP#833-305B 12'up
6.	45.00'	Due W to cut 'x' in concrete monument
7.	152.94'	Mag nail w/brass washer E PwP#164-305A 12'up